



SOLAR
BLUESUN



BSM455M-72HPH



Half-cut Mono PERC 435 W- 455 W
EFFICIENCY UP TO 20.9%



Made In Thailand



US Local Service/Inventory



Same Day Shipping

- Dimensions: 3755*1038*35mm
- Weight: 21kg
- Max. System Voltage: 1500 V (IEC/UL)

PERFORMANCE WARRANTY

15
Years

Enhanced Product Warranty on Materials and Workmanship*

25
Years

Linear Power Performance Warranty*
*According to the applicable Bluesun Solar Limited Warranty Statement.

GREAT PERFORMANCE AND RELIABILITY

- ★ Mono Perc Half Cut Technology
- ★ Better Energy Yield
- ★ Power Degradation -0.45%/25 Years Linear Warranty
- ★ TUV SUD Anti PID Certificated
- ★ IP68 Junction Box/High Water Proof Level
- ★ Reduced Hot Spot Risk

MANAGEMENT SYSTEM CERTIFICATES

- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems

PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730



BLUESUN SOLAR CO.,LTD

Add: 1499 Zhenxing Road, Shushan District, 230031 Hefei, China
Tel: +86 (158) 5821 3997 Fax: +86 (551) 6520 3660
E-mail: info@bluesunpv.com Http://www.bluesunpv.com

US Warehouse Location: Long Beach, Chicago, New Jersey Etc

ELECTRICAL PARAMETERS

Performance at STC (Power Tolerance 0 ~ +3%)

Maximum Power (Pmax/W)	435	440	445	450	455
Operating Voltage (Vmpp/V)	40.3	40.5	40.7	40.9	41.1
Operating Current (Impp/A)	10.80	10.87	10.94	11.01	11.08
Open-Circuit Voltage (Voc/V)	49.0	49.2	49.4	49.6	49.8
Short-Circuit Current (Isc/A)	11.33	11.40	11.47	11.54	11.61
Module Efficiency ηm(%)	20.0	20.2	20.4	20.7	20.9

Performance at NMOT

Maximum Power (Pmax/W)	324	328	332	335	339
Operating Voltage (Vmpp/V)	37.6	37.8	38.0	38.2	38.4
Operating Current (Impp/A)	8.62	8.67	8.73	8.78	8.84
Open-Circuit Voltage (Voc/V)	45.6	45.8	46.0	46.2	46.4
Short-Circuit Current (Isc/A)	9.15	9.20	9.26	9.32	9.37

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5 NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s

MECHANICAL SPECIFICATION

Cell Type	Monocrystalline
Cell Dimensions	166*166mm
Cell Arrangement	144 (6*24)
Weight	25.5kg (56.22lbs)
Module Dimensions	2094*1038*35mm (82.44*40.87*1.38inches)
Cable Length	Portrait 300mm/Landscape 1200mm/Customized
Cable Cross Section Size	TUV: 4mm ² (0.006inches ²)/UL: 12AWG
Front Glass	3.2mm (0.13inches) AR Coating Tempered Glass
No. of Bypass Diodes	3/6
Packing Configuration (1)	31pcs/carton, 682pcs/40hq
Packing Configuration (for USA)	31pcs/carton, 682pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP68


OPERATING CONDITIONS

Maximum System Voltage	1000V/1500V/DC(IEC)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	20A
Static Loading	Snow Loading: 5400Pa/ Wind Loading: 2400Pa
Conductivity at Ground	≤0.1Ω
Safety Class	II
Resistance	≥100MΩ
Connector	T01/LJQ-3-CSY/MC4/MC4-EVO2


TEMPERATURE COEFFICIENT

Temperature Coefficient Pmax	-0.36%/°C
Temperature Coefficient Voc	-0.26%/°C
Temperature Coefficient Isc	+0.043%/°C
NMOT	43±2°C

I-V CURVE

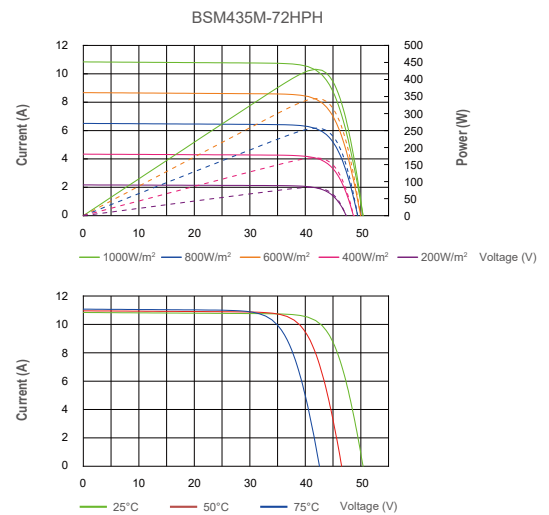

TECHNICAL DRAWINGS

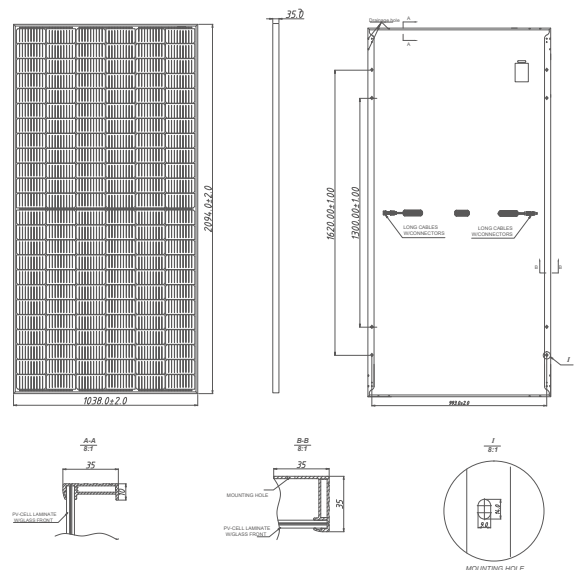

BLUESUN SOLAR CO.,LTD

Add:1499 Zhenxing Road, Shushan District,230031 Hefei,China
 Tel:+86 (158) 5821 3997 Fax:+86 (551) 6520 3660
 E-mail:info@bluesunpv.com Http://www.bluesunpv.com

US Warehouse Location: Long Beach, Chicago, New Jersey Etc